




# Amburgo

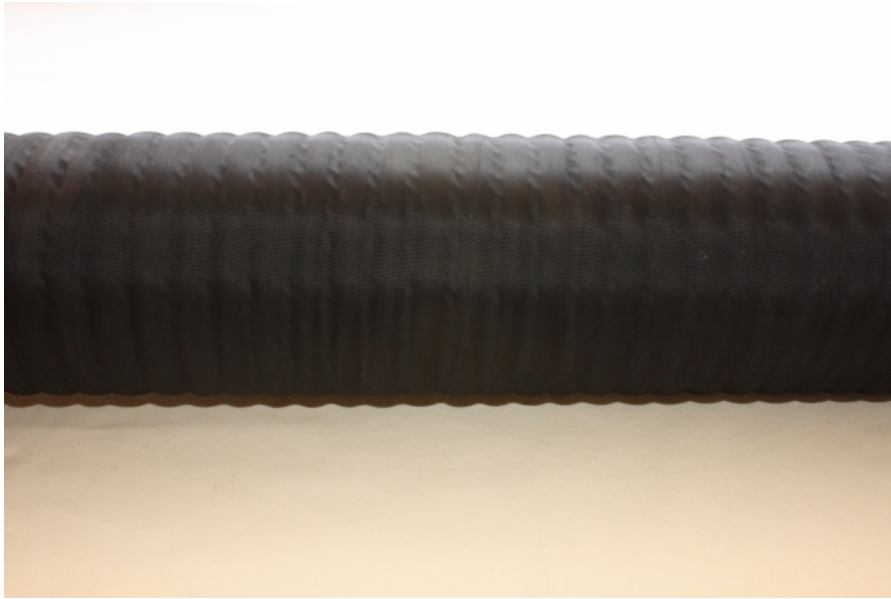

Corrugated hose for water suction and discharge service, where a rugged yet flexible hose is required by industry, building and agriculture, for overhead irrigation systems or for tank truck use.

## Properties

- **Temperature range:** -30°C +70°C
- **Tube:** black, smooth, SBR rubber compound resistant to mud compound weathering, ozone and ageing resistant
- **Cover:** synthetic rubber, red/black longitudinal stripings
- **Reinforcement:** high strength synthetic cord and helix wire

N° of art.	Dia ins. mm	Workingpressure	Burst pression	Weight (kg/m)
ABG032	32	3 bar	9 bar	0.75
ABG038	38	3 bar	9 bar	0.93
ABG050	51	3 bar	9 bar	1.29
ABG065	63	3 bar	9 bar	1.77
ABG075	76	3 bar	9 bar	2.10
ABG100	102	3 bar	9 bar	3.56
ABG125	127	3 bar	9 bar	4.27
ABG150	152	3 bar	9 bar	6.81
ABG200	203	3 bar	9 bar	9.80